

HAWAII ADMINISTRATIVE RULES

TITLE 12 DEPARTMENT OF LABOR AND INDUSTRIAL RELATIONS

SUBTITLE 8

DIVISION OF OCCUPATIONAL SAFETY AND HEALTH

CHAPTER 240

ELEVATOR REQUIREMENTS FOR HANDICAPPED

§12-240-1	General
§12-240-2	Automatic operation
§12-240-3	Hall call buttons
§12-240-4	Hall lanterns
§12-240-5	Raised characters on hoistway entrances
§12-240-6	Door protective and reopening device
§12-240-7	Door and signal timing for hall calls
§12-240-8	Door delay for car calls
§12-240-9	Floor plan of elevator cars
§12-240-10	Floor surfaces
§12-240-11	Illumination levels
§12-240-12	Car controls
§12-240-13	Car position indicators
§12-240-14	Emergency communications

**§12-240-1 General.** Passenger elevators which have had their architectural plans reviewed for installation permit after December 6, 1990, shall have accessible elevators on an accessible route and shall comply with American National standards specifications for making buildings and facilities accessible to and usable by persons with disabilities (ANSI A117.1-1986) and with the American National Standard Safety Code for Elevators, Dumbwaiters, Escalators, and Moving Walks, ASME A17.1 1996. This standard does not preclude the use of residential or fully enclosed wheelchair lifts when appropriate and approved by administrative authorities. Freight elevators shall not be considered as meeting the requirements of this section, unless the only elevators provided are used as combination passenger and freight elevators for the public and employees. [Eff. 12/6/90; am 7/6/98] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-2 Automatic operation.** Elevator operation shall be automatic. Each car shall be equipped with a self-leveling feature that will automatically bring the car to floor landings within a tolerance of 1/2 in. (13 mm) under rated loading to zero loading conditions. This self-leveling feature shall be automatic and independent of the operating device and shall correct the overtravel or undertravel. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-3 Hall call buttons.** Call buttons in elevator lobbies and halls shall be centered at 42 in. (1065 mm) above the floor. Such call buttons shall have visual signals to indicate when each

call is registered and when each call is answered. Call buttons shall be a minimum of 3/4 in. (19 mm) in the smallest dimension. The button designating the up direction shall be on top (see Figure 240-1). Buttons shall be raised or flush. Objects mounted or placed beneath hall call buttons shall not project into the elevator lobby more than 4 in. (100 mm). [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-4 Hall lanterns.** A visible and audible signal shall be provided at each hoistway entrance to indicate which car is answering a call. Audible signals shall sound once for the up direction and twice for the down direction or shall have verbal annunciators that say "up" or "down." Visible signals shall have the following features:

- (1) Hall lantern fixtures shall be mounted so that their centerline is at least 72 in. (1830 mm) above the lobby floor;
- (2) Visual elements shall be at least 2-1/2 in. (64 mm) in the smallest dimension; and
- (3) Signals shall be visible from the vicinity of the hall call button. In-car lanterns located in cars, visible from the vicinity of hall call buttons, and confirming to the above requirements, shall be acceptable (see Figure 240-1). [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-5 Raised characters on hoistway entrances.** All elevator hoistway entrances shall have raised floor designations provided on both jambs. The centerline of the characters shall be 60 in. (1525 mm) from the floor. Such characters shall be 2 in. (50 mm) high and shall comply with ANSI A117.1-1986 Rule 1.30. Permanently applied plates are acceptable if they are permanently fixed to the jambs (See Figure 240-1). [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-6 Door protective and reopening device.** Elevator doors shall open and close automatically. They shall be provided with a reopening device that will stop and reopen a car door and hoistway door automatically if the door becomes obstructed by an object or person. The device shall be capable of completing these operations without requiring contact for an obstruction passing through the opening at heights of 5 in and 29 in. (125 mm and 735 mm) from the floor (see Figure 240-1). Door reopening devices shall remain effective for at least 20 seconds. After such an interval, doors may close in accordance with the requirements of ANSI A17.1b-1989. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-7 Door and signal timing for hall calls.** The minimum acceptable time from notification that a car is answering a call until the doors of that car start to close shall be calculated from the following equation:

$$T = \frac{D}{1.5 \text{ ft/s}} \quad \text{or} \quad T = \frac{D}{455 \text{ mm/s}}$$

where T = total time in seconds and D = distance (in feet or millimeters) from a point in the lobby or corridor 60 in. (1525 mm) directly in front of the farthest call button controlling that car to the centerline of its hoistway door (see Figure 240-2). For cars with in-car lanterns, T begins when the lantern is visible from the vicinity of hall call buttons and an audible signal is sounded. The minimum acceptable notification time shall be 5 seconds. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-8 Door delay for car calls.** The minimum time for elevator doors to remain fully open in response to a car call shall be 3 seconds. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-9 Floor plan of elevator cars.** The floor area of elevator cars shall provide space for wheelchair users to enter the car, maneuver within reach of controls, and exit from the car. Acceptable door opening and inside dimensions shall be as shown in Figure 240-3. The clearance between the car platform sill and the edge of any hoistway landing shall be no greater than 1-1/4 in (32 mm). [Eff. 12/6/90; am 7/6/98] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-10 Floor surfaces.** Floor surfaces shall comply with ANSI A117.1-1980 Rule 4.5. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-11 Illumination levels.** The level of illumination at the car controls, platform, and car threshold and landing sill shall be at least 5 footcandles (53.8 lux). [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-12 Car controls.** Elevator control panels shall have the following features:


- (1) Buttons. All control buttons shall be at least 3/4 in. (19 mm) in their smallest dimension. They may be raised or flush;
- (2) Tactile and Visual Control Indicators. All control buttons shall be designated by raised standard alphabet characters for letters, arabic characters for numerals, or standard symbols as shown in Figure 240-4(a), and as required in ANSI A17.1-1989. Raised characters and symbols shall comply with ANSI A117.1-1986 Rule 4.30. The call button for the main entry floor shall be designated by a raised star at the left of the floor designation (see Figure 240-4(a)). All raised designations for control buttons shall be placed immediately to the left of the button to which they apply. Applied plates, permanently attached, are an acceptable means to provide raised control designations. Floor buttons shall be provided with visual indicators to show when each call is registered. The visual indicators shall be extinguished when each call is answered;
- (3) Height. All floor buttons shall be no higher than 54 in. (1220 mm), above the finish floor for side approach and 48 in. for front approach. Emergency controls, including the

emergency alarm and emergency stop, shall be grouped at the bottom of the panel and shall have their centerlines no less than 35 in. (890 mm) above the floor (see Figure 240-4(a) and (b)); and

- (4) Location. Controls shall be located on a front wall if cars have center opening doors, and at the side wall or at the front wall next to the door if cars have side opening doors (see Figure 240-4(c) and (d)). [Eff. 12/6/90; am 11/5/93] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-13 Car position indicators.** In elevator cars, a visual car position indicator shall be provided above the car control panel or over the door to show the position of the elevator in the hoistway. As the car passes or stops at a floor served by the elevators, the corresponding numerals shall illuminate, and an audible signal shall sound. Numerals shall be a minimum of 1/2 in. (13 mm) high. The audible signal shall be no less than 20 decibels with a frequency no higher than 1500 Hz. An automatic verbal announcement of the floor number at which a car stops or which a car passes may be substituted for the audible signal. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)

**§12-240-14 Emergency communications.** If provided, emergency two-way communication systems between the elevator and a point outside the hoistway shall comply with ANSI A17.1-1989. The highest operable part of a two-way communication system shall be a maximum of 48 in. (1220 mm) from the floor of the car. It shall be identified by a raised or recessed symbol and lettering complying with ANSI A117-1986 Rule 4.30 and located adjacent to the device. If the system uses a handset, then the length of the cord from the panel to the handset shall be at least 29 in. (735 mm). If the system is located in a closed compartment, the compartment door hardware shall conform to ANSI A117.1-1980 Rule 4.27, Controls and Operating Mechanisms. The emergency intercommunication system shall not require voice communication. [Eff. 12/6/90] (Auth: HRS §397-4) (Imp: HRS §397-4)



**NOTE:** The automatic door reopening device is activated if an object passes through either line A or line B. Line A and Line B represent the vertical locations of the door reopening device not requiring contact.

**Figure 240-1**  
**Hoistway and Elevator Entrances**




Figure 240-2  
Graph of Timing Equation







Figure 240-3  
Minimum Dimensions of Elevator Cars

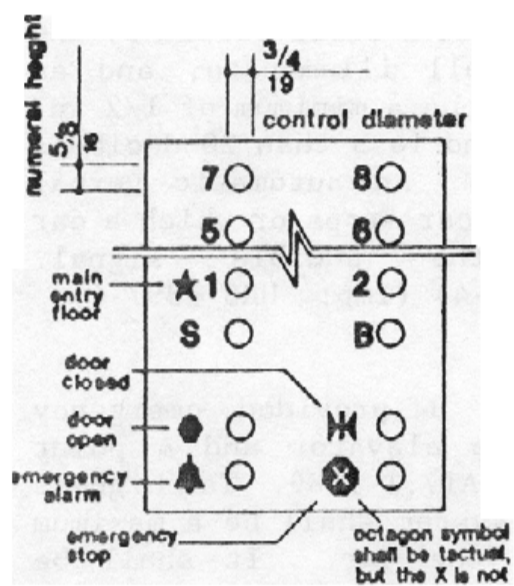


(a)  
Panel Detail



(b)  
Control Height



(c)  
Alternate Locations of Panel  
with Center Opening Door



(d)  
Alternate Locations of Panel  
with Side Opening Door

Figure 240-4  
Car Controls